

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

# P/N 8424.300



Swivelling hose reel in AISI 304 stainless steel s. 430, for hot water, 200 bar, without hose. Inlet G 3/8 (f), outlet G 1/2 (f)

## **AREAS OF USE**


Agriculture, Cleaning, Building and road construction, Chemical industry, Manufacturing industry, Mining industry, Shipping and offshore, Railway transport

#### **FEATURES**

Pressure	200 bar	
Compatible fluids	water max 130 °C	
Swivel joint	AISI 304 stainless steel	
Seals	Viton <sup>®</sup>	
Characteristic	swivelling	
Material	AISI 304 stainless steel	
Couplings	-	
Hose	-	
ø and hose length	-	
Inlet	G 3/8" (f)	
Outlet	G 1/2" (f)	
Reel flow path	AISI 304 stainless steel	



### **OVERALL DIMENSIONS (mm)**

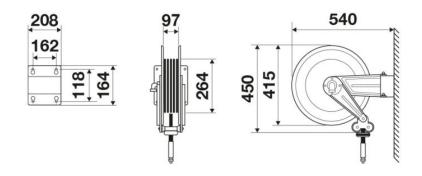

### **HOSE REELS CAPACITY**

ø 5/16"	ø 3/8"	ø 1/2"
20 m	20 m	16 m